


## LED P2.6 Indoor

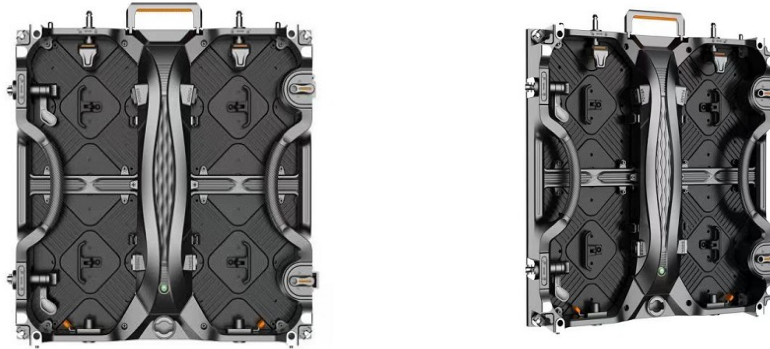

### TECHNICAL SPECIFICATION

Module		Cabinet	
Dimensions	250 mm x 250 mm	Dimensions	500 x 500 x 83 mm
Resolution	96 x 96	Weight	7,5 kg
Pixel pitch	2,6 mm	Module quantity	4
Pixel density	147456 px/m <sup>2</sup>	Total pixels	36864 (192 x 192)
Configuration of pixel	1R1G1B	Average consumption	200 W/m <sup>2</sup>
LED type	SMD1515	Maximum consumption	600 W/m <sup>2</sup>
		Material	Aluminium/ Die Cast

### Main Parameters

Brightness	800 cd/m <sup>2</sup> (Nit)
Color temperature	6.500K
Minimum viewing distance	3 m
Viewing angle	140°
Blind spot rate	< 0,0001
Lifetime at 50%brightness	100.000 h
Input voltage / frequency	86-264 V 50-60 Hz
Operation temperature	-20°C / +50°C ± 10 %
Refresh frequency	3000 Hz
Grey scale	14-bit
Brightness control	256 levels
Ingress protection	IP30
Angular settings	-5°-2.5° 0° +2.5° +5°