


## LED P3.9 Indoor

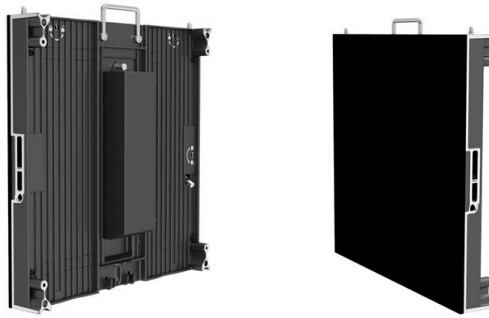

### TECHNICAL SPECIFICATION

#### P3.9 Indoor

Module		Cabinet	
Dimensions	250 mm x 250 mm	Dimensions	500 mm x 500 mm x 60 mm
Resolution	64 x 64	Weight	8,5 kg
Pixel pitch	3,91 mm	Module quantity	4
Pixel density	65536 px/m <sup>2</sup>	Total pixels	16384 (128 x 128)
Pixel configuration	1R1G1B	Average consumption	280 W/m <sup>2</sup>
LED configuration	SMD3258	Maximum consumption	550 W/m <sup>2</sup>
		Material	Aluminium
Main parametres			
Brightness	1000 cd/m <sup>2</sup> (Nit)		
Color temperature	6.500K		
Minimum viewing distance	4 m		
Viewing angle	140°		
Blind spot rate	< 0,0001		
Lifetime at 50% brightness	100.000 h		
Input voltage / frequency	86-264 V 50-60 Hz		
Operation temperature	-20°C / +50°C ± 10 %		
Connectors	Seetronics		
Refresh frequency	1920 Hz		
Grey scale	14 Bit		
Brightness control	256 levels		
Ingress protection	IP43		
Signal input format	Composite, S-Video, VGA, DVI, YPbPr, HDMI, SDI		